

Barcelona

YEARS OF WARRANTY


5 TANK **2** EQUIPMENT

The extra performance under hard conditions

- Long-lasting **Fiberpool® bobbin wound technology** allows high pressure rates
- **Maximum pressure: 2.5 bar**
- **Test pressure: 3.75 bar**
- **Reliable under the most exigent environments**
- **Operating pressure: 0.5 to 2.5 bar**



FIBERPOOL®
Technology

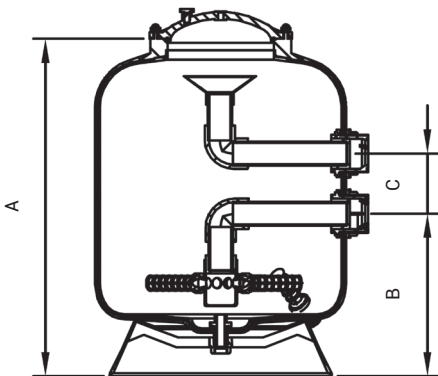

BARCELONA

Flow rate	Diameter Ø	In/Out	Filtration area	Empty weight	Sand	Dimensions			Item	Replacement valves *
						A	B	C		
9.5 m³/h	500 mm	1.5"	0.19 m²	22 kg	100 kg	700 mm	337 mm	125 mm	HCFE2115I2WVA	Valve: 50112010000 connections: 500200060200
14 m³/h	600 mm	1.5"	0.28 m²	24 kg	150 kg	800 mm	382 mm	125 mm	HCFE2415I2WVA	
21 m³/h	750 mm	2"	0.44 m²	29 kg	275 kg	865 mm	397 mm	141 mm	HCFE312I2WVA	Valve: 250120010000 connections: 500200060300
28 m³/h	900 mm	2"	0.63 m²	64 kg	450 kg	950 mm	435 mm	141 mm	HCFE352I2WVA	

*When changing a valve, it is necessary to purchase both the valve and the appropriate connection