

# SwimClear™ Single Element

FILTERS

## Compact design for clear water

- ➔ **Very fine filtration** (20 to 25 microns)
- ➔ **Ease of maintenance:** just one filtration element to clean
- ➔ **Ease of installation**
- ➔ **NSF Certified**
- ➔ **Excellent hydraulics** that reduce installation head losses
- ➔ **Compact design** with minimum ground coverage
- ➔ **No backwashing:** saves on water, heating and chemicals (ideal with a salt chlorinator as there is no loss of salt)
- ➔ **Can be installed outdoors** thanks to its weather-resistant tank




### EXPERT LINE



Easy-to-remove filter cartridge



- 1 Recessed pressure gauge. Place the head assembly upside-down on pool pad.
- 2 Ergonomic grip handles: provide multiple handling locations.
- 3 Easy-lok™ ring design. Quick access to internal components.
- 4 Lowest body height to lift elements.
- 5 Complete built-in drain offering full and fast cleaning for simplified filter draining.

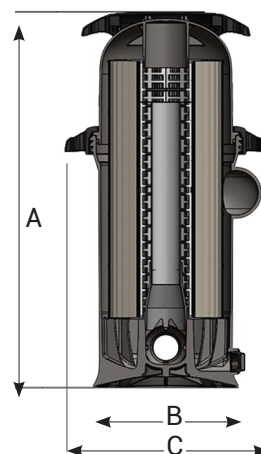

SWIMCLEAR™ SINGLE ELEMENT

|  | Effective filtration area | Equivalent flow (sand filter) | In/Out   | Weight empty | Dimensions |        |        | Item   |
|--|---------------------------|-------------------------------|----------|--------------|------------|--------|--------|--------|
|  |                           |                               |          |              | A          | B      | C      |        |
|  | 9.3 m <sup>2</sup>        | 20 m <sup>3</sup> /h          | 50/63 mm | 15 kg        | 775 mm     | 330 mm | 464 mm | C100SE |
|  | 14 m <sup>2</sup>         | 25 m <sup>3</sup> /h          | 50/63 mm | 16.8 kg      | 857 mm     | 330 mm | 464 mm | C150SE |
|  | 18.6 m <sup>2</sup>       | 30 m <sup>3</sup> /h          | 50/63 mm | 18.1 kg      | 984 mm     | 330 mm | 464 mm | C200SE |

REPLACEMENT SWIMCLEAR™ SINGLE ELEMENT CARTRIDGES

| Item   | Diameter Ø outside | Diameter Ø inside | Height   | Quantity required | Item     |
|--------|--------------------|-------------------|----------|-------------------|----------|
| C100SE | 263.9 mm           | 101.1 mm          | 499.1 mm | 1                 | CX100XRE |
| C150SE | 263.9 mm           | 101.1 mm          | 591.6 mm | 1                 | CX150XRE |
| C200SE | 263.9 mm           | 101.1 mm          | 718.6 mm | 1                 | CX200XRE |