


K-FLO

High performance with silent operation

- ➔ **Twist-Lock cover**, rapid access (no tools required)
- ➔ **Impeller and diffuser made of Noryl®**, very hard-wearing and corrosion-resistant, high dimensional stability
- ➔ **Suitable for use in salt water**, corrosion proof seal assembly
- ➔ **Direct replacement** for KS pumps
- ➔ Unions included
- ➔ Available in **variable-speed** to adapt the speed according to the needs
- ➔ Recommended for pools **up to 150 m³**





See-through Twist-Lock strainer cover



Double drain with easy opening (no tools required)



Unions kit included (50/63 mm)

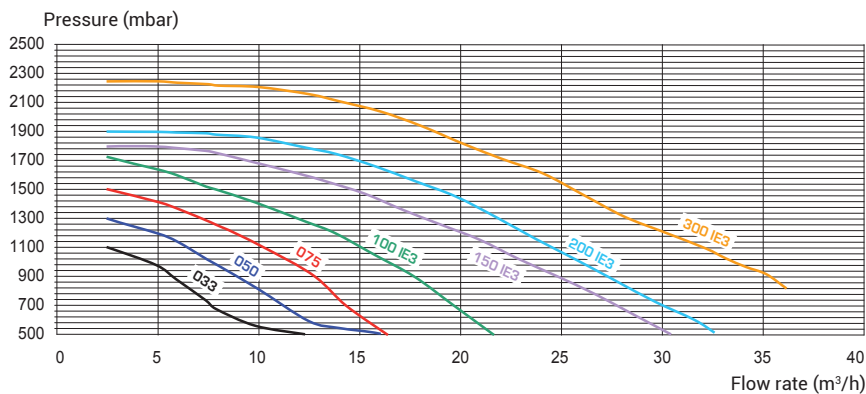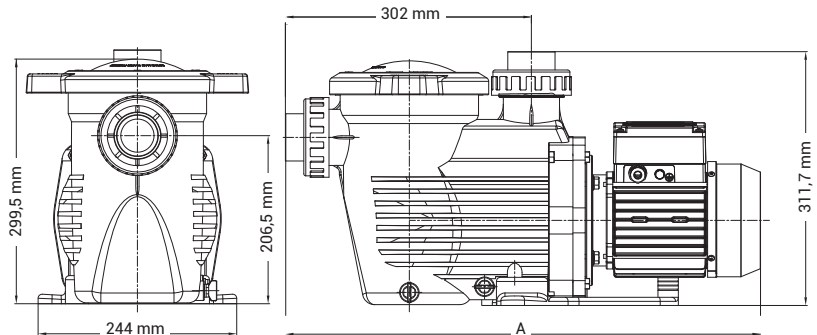

Type	Side A	Weight	I/O	Flow rate*	Input Power P1	Output Power P2	Amperage	Item		
SINGLE PHASE K-FLO	1/3 CV	543 mm	11.2 kg	50 mm	4.8 m ³ /h	450 W	330 W	2.5 A	SPK12603XY1	
	1/2 CV	590 mm	12.5 kg	50 mm	7.5 m ³ /h	580 W	500 W	3.2 A	SPK12605XY1	
	3/4 CV	590 mm	13.5 kg	50 mm	11.5 m ³ /h	750 W	750 W	3.8 A	SPK12607XY1	
	1 CV	590 mm	14 kg	50 mm	15.4 m ³ /h	1000 W	1000 W	5 A	SPK12610XY1	
	1,5 CV	620 mm	16.5 kg	63 mm	21.9 m ³ /h	1600 W	1500 W	7.5 A	SPK12615XY1	
	2 CV	620 mm	22.5 kg	63 mm	25.7 m ³ /h	1920 W	2000 W	9 A	SPK12620XY1	
	3 CV	620 mm	25 kg	63 mm	33 m ³ /h	2600 W	3000 W	12.5 A	SPK12630XY1	
THREE PHASE K-FLO	1/2 CV	590 mm	12.5 kg	50 mm	7.5 m ³ /h	580 W	500 W	2.45/1.4 A	SPK12605XY3	IE3 ✓
	3/4 CV	590 mm	13.5 kg	50 mm	11.5 m ³ /h	750 W	750 W	3/1.7 A	SPK12607XY3	IE3 ✓
	1 CV	620 mm	16.5 kg	50 mm	15.4 m ³ /h	1000 W	1000 W	3.4/2 A	SPK12610XY3	IE3 ✓
	1,5 CV	620 mm	19 kg	63 mm	21.9 m ³ /h	1700 W	1500 W	5/2.9 A	SPK12615XY3	IE3 ✓
	2 CV	620 mm	25 kg	63 mm	25.7 m ³ /h	1930 W	2000 W	6.1/3.5 A	SPK12620XY3	IE3 ✓
	3 CV	620 mm	27 kg	63 mm	33 m ³ /h	2600 W	3000 W	8.3/5.0 A	SPK12630XY3	IE3 ✓

* under 8 m water column pressure