



Pro-Series™ HB Side / Pro-Series™ HB Top

Performance and reliability

- Blown polyethylene filter for **excellent resistance to high pressures (3.5 bar)**
- **Tank manufactured according to the NSF standard**
- **High resistance to treatment products**
- **Weather resistant**, can be installed outdoors
- **Easy maintenance of the filtering medium** without removing the valve
- **Swivel-mounted laterals** for ease of maintenance
- **40 to 50 micron filtration**



Pro-Series™ HB Side

Pro-Series™ HB Top




Vari-Flo™
6-position valve



Sand easily
accessible by
removing the collar



Drain with plug that
also serves as a
dismantling tool

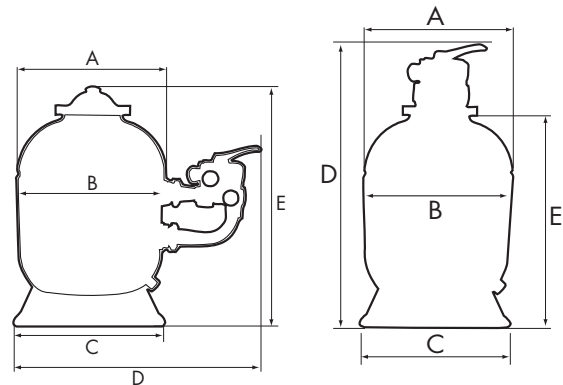

**PRO-SERIES™
HB SIDE**

Flow rate*	Effective filtration area	In/Out	Weight when empty	Sand in kg	Dimensions in mm					Item
					A	B	C	D	E	
10 m³/h	0.20 m²	1.5"	17 kg	100	510	498	521	825	810	S210SXE
14 m³/h	0.28 m²	1.5"	24 kg	150	612	594	521	875	920	S244SXE
22 m³/h	0.45 m²	2"	35 kg	250	762	725	585	1070	1008	S0310SXE
30 m³/h	0.64 m²	2"	61 kg	350	895	880	585	1230	1147	S0360SXE

**PRO-SERIES™
HB TOP**

6 m³/h	0.12 m²	1.5"	12 kg	50	401	391	371	858	598	S166TXE
10 m³/h	0.20 m²	1.5"	17 kg	100	511	500	521	989	729	S210TXE
14 m³/h	0.28 m²	1.5"	24 kg	150	612	594	521	1097	837	S244TXE
22 m³/h	0.45 m²	2"	31 kg	250	762	725	585	1240	934	S0310TXE
30 m³/h	0.64 m²	2"	61 kg	350	895	880	585	1374	1068	S0360TXE

* Provide sufficient height to open the filter (minimum clearance height: 650 mm above the filter).