

Max-Flo™

YEARS OF WARRANTY



Efficient and durable

- **Compact design, ideal** for very small equipment rooms
- Excellent value for money
- **Input and output tapped to 1.5"**
- Suitable for all types of pool **up to 70 m³ for the 1.5 HP model and up to 90 m³ in the 2 HP model**





In / Out 1.5"



See-through strainer cover



Drain plugs for an easy wintering

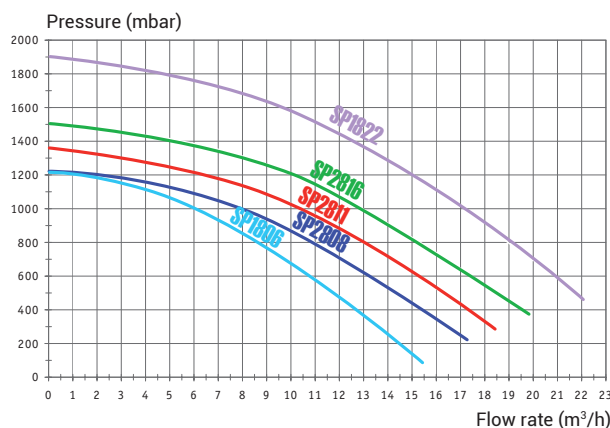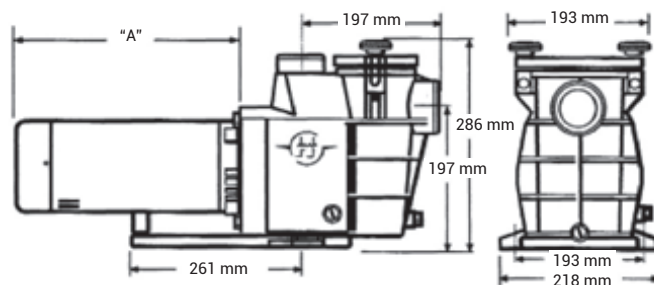

SINGLE PHASE
MAX FLO™

THREE PHASE
MAX FLO™

ACCESSORIES

Power (HP)	Flow rate*	In/Out	Weight	Side A	Input Power P1	Output Power P2	Amperage	Item
0.5	8 m ³ /h	1.5"	14 kg	183 mm	870 W	590 W	2.9 A	SP1806XE81
0.75	11 m ³ /h	1.5"	14 kg	183 mm	870 W	590 W	3.6 A	SP2808XE111
1	13 m ³ /h	1.5"	15 kg	213 mm	975 W	720 W	4.3 A	SP2811XE161
1.5	15 m ³ /h	1.5"	15 kg	213 mm	1 100 W	790 W	5 A	SP2816XE221
2	19 m ³ /h	1.5"	17 kg	232 mm	1 500 W	1 160 W	7.25 A	SP1822XE251
3/4	11 m ³ /h	1.5"	13 kg	183 mm	750 W	545 W	2.1/1.2 A	SP2808XE113
1	13 m ³ /h	1.5"	14 kg	213 mm	945 W	750 W	3.3/1.9 A	SP2811XE163 IE3 ✓
1.5	15 m ³ /h	1.5"	15 kg	213 mm	945 W	750 W	3.2/1.85 A	SP2816XE223 IE3 ✓

* under 8m water column pressure

Description	Item
Strainer Basket	SPX2800M
Set of seals comprising: mechanical o-ring, housing o-ring, diffuser o-ring, prefilter cover-o-ring, bearing protection o-ring.	SPX1800GS