

AquaRite® + SV

Excellent value for money

- **One single box for salt chlorination and pool equipment regulation and control** (including filter pumps, heat pumps, lighting, etc.)
- **Wifi module:** simple, trouble-free **remote management**
- **Salt treatment included**
- Clean water at all times: **saves on chemicals** and offers unrivalled bathing comfort
- **Transparent cell** to enable a visual check of the production. Gas sensor included.



EXPERT LINE



Standard probe




Detachable screen



Touch Screen (optional)



Download the **Hayward® Poolwatch** application today and remotely manage your (or your customers') AquaRite® + salt chlorinator.

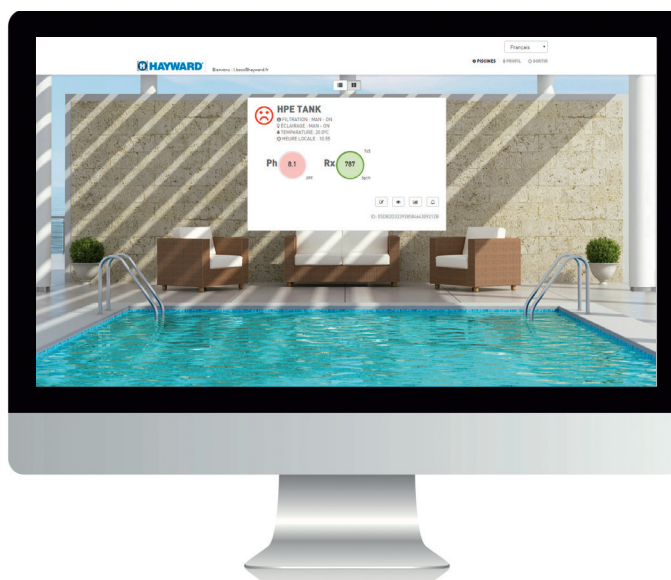

poolwatch.hayward.fr

AquaRite® + SV



AQUARITE® +

Description	AQR-PLUS-SV16ST	AQR-PLUS-SV22ST	AQR-PLUS-SV33ST	AQR-PLUS-SV50ST
Maximum production Cl ₂ /h	16 gr	22 gr	33 gr	50 gr
Salt concentration	From 3gr up to 100 gr Na/Cl			
Pool volume	65	110	200	300
Display	2,8" TFT			
Alimentation	220 V 50/60 Hz			
Dimensions	270 x 220 x 115 mm			
Electronic box	Fireproof black ABS plastic			
Front cover	White ABS plastic			
Output	8-15 A	8-20 A	10-15 A	35-45 A
Consumption	120 W	160 W	150 W	360 W
WiFi module	Optional			
Principal control outputs	Filtration time / Light / Temperature			
Additional control outputs	4 additional user-configurable outputs			
pH control	Yes			
ORP control	Optional			
Temperature control	Yes			
Automatic cleaning	Operates by reverse polarity			
Salinity testing	Salinity detected in g/l (accuracy +- 10%)			
Pool cover	Programmable 0 – 100% production as a function of pool cover being open or closed			

AQUARITE® + TRANSPARENT CELL

NEW

 AVAILABLE
OPTIONS

Description	AQR-PLUS-SV16ST	AQR-PLUS-SV22ST	AQR-PLUS-SV33ST	AQR-PLUS-SV50ST
ORP standard probe kit	AQR-LT-KITORP			
Probe for free chlorine	AQR-PLUS-CL			
Wifi module	AQR-PLUS-WIFI2			
Ethernet module	RS2NET-OPTION-L			
Touch screen	CTS-OPTION-TS			
Detachable TFT screen	AQR-PLUS-PANL			

AQUARITE® + STANDARD PROBE

NEW

 AVAILABLE
OPTIONS

Description	AQR-PLUS-SV16ST	AQR-PLUS-SV22ST	AQR-PLUS-SV33ST	AQR-PLUS-SV50ST
Electrolysis cell	4 Titanium cell plates MONOPOLAR	5 Titanium cell plates MONOPOLAR	7 Titanium cell plates MONOPOLAR	5 titanium plates MONOPOLAR
Minimum flow	5 m ³ /h	7 m ³ /h	9 m ³ /h	9 m ³ /h
Dimension cell plates	200 x 45 mm	200 x 45 mm	200 x 45 mm	400 x 45 mm
Material cell housing	Plastic PVC transparent			
Cell fastener	Thread for an easy installation			
Diameter tube connection	63 mm			
Dimension cell	355 x 305 x 305 mm			
Cell cable size	(3 x 4) x 1.5 m			
Gas sensor	Included in the cell			Flow switch
Maximum pressure	4 Kg/cm ²			
Maximum temperature	45°C			