

# K-FLO VSTD

## The ideal speed for any application

- ➔ **Energy saving: up to 85%\* on electricity consumption**
- ➔ **Extremely quiet**
- ➔ **Simple digital use interface**
- ➔ **4 digital inputs** to allow the pump to be controlled via an AquaRite® + type home-control box
- ➔ **180° rotary box** for inconvenient access to the user interface
- ➔ **Connection box** for easier electrical connection
- ➔ **Quarter-turn opening cover** for easy maintenance
- ➔ **Union fittings provided** to ensure ease of installation
- ➔ Recommended for pools **up to 80 m<sup>3</sup>**

\* Energy savings of at least 65% are generally achieved.





See-through Twist-Lock strainer cover



Double drain with easy opening (no tools required)



Unions kit included (50/63 mm)

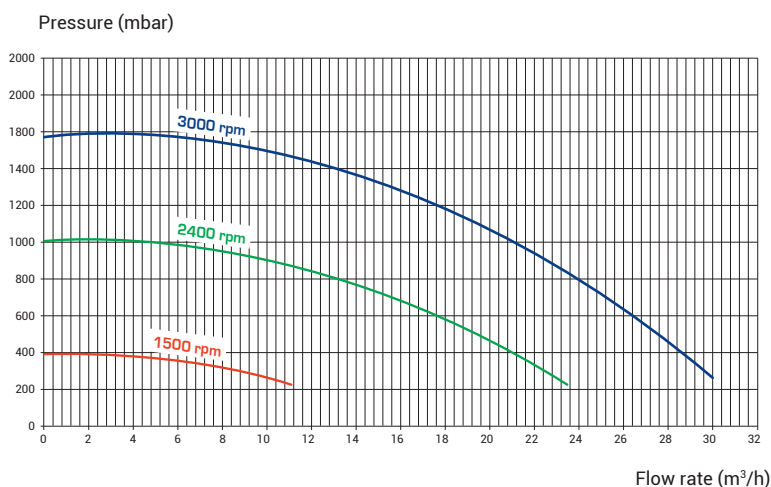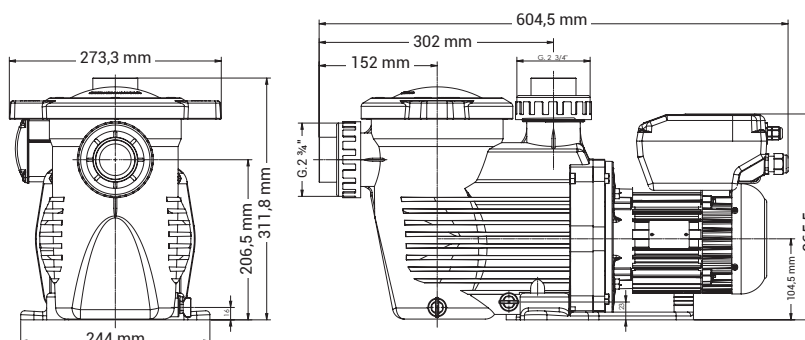

Type	Flow rate*	I/O	Weight	Input Power P1	Output Power P2	Amperage	Item.
1.5 CV	21 m <sup>3</sup> /h	63 mm	15 kg	1240 W	1100 W	-	SPK12615VSTD

**K-FLO VSTD**

\*at 3000 Rpm